




Check panels before installation.

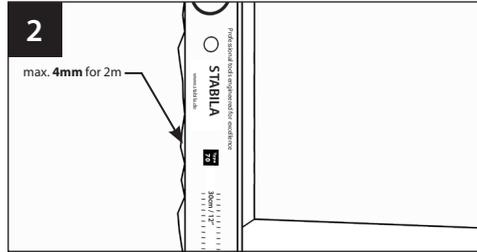


Preparing to installation. Surface leveling in case of irregularities more than 4 mm.

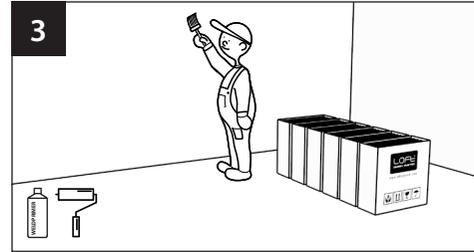


Preparing the wall. Prim the wall with WeldPrimer, and if the surface is slippery use Joni Grip.

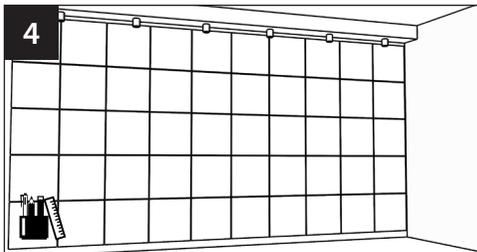


Measure the wall and arrange your panels the way you want them on the wall.

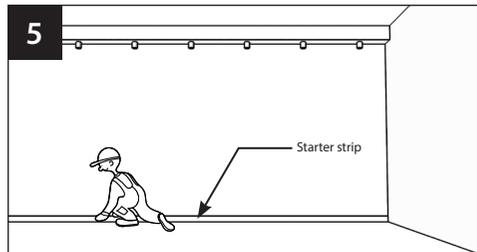


Starter strip is necessary just if panels will be install above the level of floor. The starting strip should be made of solid, non bending material.

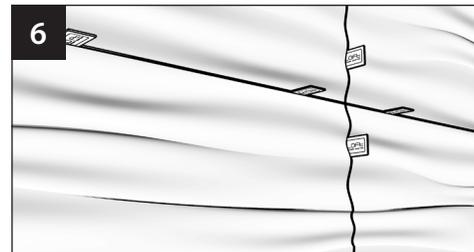

Gluing individual panels (keep the distance between the panels from 1.5 to 3 mm). Another layers of panels mounted after making sure that the previous layer is permanently mounted. For high-quality installation, use the original cardboards.

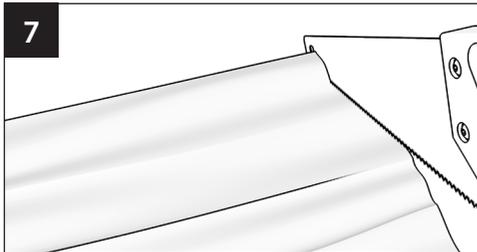

If it is necessary, panels can be re-cut by blade for wood.

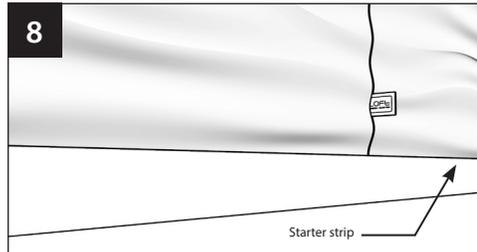


Uninstalling the starter strip.



To join panels use the gypsum putty Weldmasa. After application and drying, joints must combine smooth with sandpaper with a grade of 240. If it is necessary, repeat the process until a smooth surfaces.



Before painting, panels should be prime by WeldPrimer by using a velor roller.

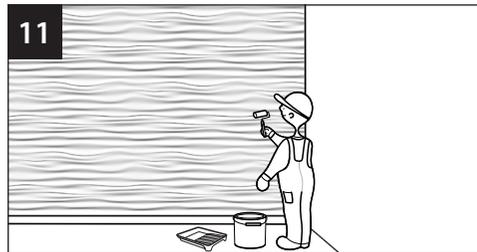

Painting each paint and each tools (paintbrush, velor roller, airbrush).

Tools important for installation:

Gypsum glue or install Weldfix Ultra, sandpaper 240, contour line, gypsum putty Weldmas, blade for wood, velor roller.

1. Check panels before installing them if there are any damages or defects. Each damages report to producer before installing. Lay panels on the floor and check if elements fit one to another. Mounted decorative panels, are no subject to complain.

2. Prepare the wall to installing decorative panels. Irregularities more than 4 mm, should be level out by gypsum putty or be delete by using a sandpaper.

3. Prim the wall by WeldPrimer, and if the surface is slippery use Joni Grip.

4. Measure the wall, on which panels will be mounting and arrange the way you want to put first layer of decorative panels.

5. If decorative panels will be mounting above the level of floor, for mounting time, you must install the strip runway in the form of aluminum or wooden slats bolted to the wall. The task of it is to maintain the panels during the bonding. The starting strip should be made of solid, non bending material.

6. Continue the mounting of decorative panels, but remember about distance between each elements from 1,5 to 3mm. This distance will help you to avoid micro cracks on joining of decorative panels. To regulate distance, use the cardboards, and after drying it will be possible to take them off easily.

To mounting decorative panels we recommend gypsum glue or Weldfix Ultra.

7. If it is necessary, Loft Design System decorative panels can be re-cut by using a blade for wood.

8. After the adhesive has set, remove the strip start and cardboards.

9. To join panels use a gypsum putty Weldmasa. After putting and drying the mass, joint should be smooth by using a sandpaper of 240 gradation. If it is necessary, you can repeat this process.

10. Before you start painting, Loft Design System decorative panels should be prime by WeldPrimer.

11. For painting panels of Loft Design System brand, you can use each paint for interiors and tools (paintbrush, velor roller, airbrush).



3D DECORATIVE PANELS
www.loftsystem.com